

Astar Sportback Classic 0W40

Fully synthetic – A3 / B4 Recommended for extreme weather.

Fully synthetic engine oil of the latest generation, for the lubrication of all gasoline and diesel engines of passenger cars. Can be used in all 4-stroke gasoline engines, multi-val- ves, turbo and 4-stroke diesel engines, with or without turbo.




SAFETY / HYGIENE

Safety data sheets are available on request in order to provide up-to-date information. The company can not be held liable for damage caused by misuse of the product and in case of non-observance of the specified precautions.

SPECIFICATIONS

- ACEA A3/B4-12
- API: SN/CF
- BMW Long Life-01
- MB 229.3/229.5
- RN 0700/0710
- VW 502.00 / 505.00
- Porsche A40

PACKAGING

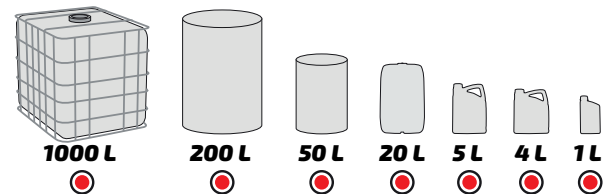

CHEMICAL PROPERTIES

Analysis Type	Method	Results
Grade SAE		0W-40
Viscosity at 100° C. (cSt)	ASTM D – 445	9,30 a 16
Viscosity at -30°C. (cP)	ASTM D – 5293	<6200
Viscosity HTHS at 150°C.	ASTM D – 5481	>3.5
Viscosity Index min.	ASTM D – 2270	160
Flash point (°C)	ASTM D – 92	230
Pour Point. (°C)	ASTM D – 97	-47
Sulphated ashes (% weight)	ASTM D - 874	<0.8
TBN mg KOH/g	ASTM D – 2896	>6

The data provided are based on standard tests in laboratory conditions and serve only as a reference point. This data sheet and the information contained herein are valid on the date of issue.



Performance & Quality Oil