

Astar Sportback Eco 15W40 SL

Excellent Multigrade lubricant with high quality and durability of Service.

Oil High Performance for all types of diesel & gasoline cars, turbocharged, etc.

- It helps to low exhaust gas emissions and have low phosphorus content, that extends the life of the catalysts.
- Good anti-wear, anticorrosion, detergents and dispersant qualities.
- Long life service lubricant.
- Maintains carbonaceous particles in suspension.

SAFETY / HYGIENE

Safety data sheets are available on request in order to provide up-to-date information. The company can not be held liable for damage caused by misuse of the product and in case of non-observance of the specified precautions.

SPECIFICATIONS

- ACEA A3/B3-12
- API:SL/CF-4
- MB 229.1
- VW 501.01 / 505.00


CHEMICAL PROPERTIES

Analysis Type	Method	Results
Grade SAE		15W40
Viscosity at 100° C. (cSt)	ASTM D - 445	12.50 - 16.30
Viscosity at -30° C. (cP)	ASTM D - 5293	<7000
Viscosity Index min.	ASTM D - 2270	135
Flash point (°C)	ASTM D - 92	230
Pour Point. (°C)	ASTM D - 97	-35
Sulphated ashes (% weight)	ASTM D - 874	<1.5
TBN mg KOH/g	ASTM D - 2896	>8

The data provided are based on standard tests in laboratory conditions and serve only as a reference point. This data sheet and the information contained herein are valid on the date of issue.



PACKAGING

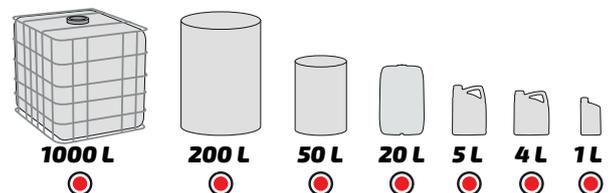

Performance & Quality Oil