

## Astar Sportback Eco FE C1 5W30

Fully synthetic – C1 (DPF) Recommended for Ford.

Fully synthetic Lubricant "Fuel economy" especially designed to last generation cars with ACEA C1 diesel engines equipped with diesel particulate filters. Lubricants with low friction, low HTHS and "Low SAPS".

### SAFETY / HYGIENE

Safety data sheets are available on request in order to provide up-to-date information. The company can not be held liable for damage caused by misuse of the product and in case of non-observance of the specified precautions.

### SPECIFICATIONS

- ACEA C1-12
- Ford WSS - M2C 934A
- JASO DL-1


### CHEMICAL PROPERTIES

Analysis Type	Method	Results
Grade SAE		<b>5W-30</b>
Viscosity at 100° C. (cSt)	ASTM D – 445	9.30 - 12.50
Viscosity at -30°C. (cP)	ASTM D – 5293	<6600
Viscosity HTHS at 150°C.	ASTM D – 5481	2.9 - 3.5
Viscosity Index min.	ASTM D – 2270	155
Flash point (°C)	ASTM D – 92	225
Pour Point. (°C)	ASTM D – 97	-35
Sulphated ashes (% weight)	ASTM D – 874	<0.5
TBN mg KOH/g	ASTM D – 2896	>6

The data provided are based on standard tests in laboratory conditions and serve only as a reference point. This data sheet and the information contained herein are valid on the date of issue.



### PACKAGING

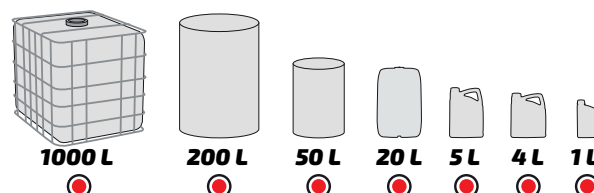

**Performance & Quality Oil**