

Astar Sportback Eco V-LL 5W30

100% synthetic lubricant with high quality synthetic base oils, formulated with PAO and Group III synthetic base oils with specific additives of last generation to meet the most demanding standards presented, suitable for use in modern gasoline and diesel VAG group (VW, Audi, Seat and Skoda). It is suitable to meet the new specifications for VW 504.00/507.00 VW AG with pump injector system. Can be used in all vehicles where they are required earlier with VW specifications.

It has excellent lubrication properties to withstand the additional load, from the system injector unit reducing friction and increasing wear resistance at elevated temperatures.

SAFETY/ HYGIENE


Safety data sheets are available on request in order to provide up-to-date information. The company can not be held liable for damage caused by misuse of the product and in case of non-observance of the specified precautions.



SPECIFICATIONS

- ACEA C3-12
- BMW Long Life-04
- MB Approbation 229.51
- Porsche C30
- VW 504.00 / 507.00

PACKAGING

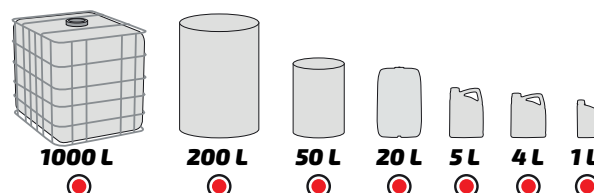

CHEMICAL PROPERTIES

Analysis Type	Method	Results
Grade SAE		5W-30
Viscosity at 100° C. (cSt)	ASTM D - 445	9.30 - 12.50
Viscosity at -30°C. (cP)	ASTM D - 5293	<6600
Viscosity HTHS at 150°C.	ASTM D - 5481	> 3.5
Viscosity Index min.	ASTM D - 2270	154
Flash point (°C)	ASTM D - 92	228
Pour Point. (°C)	ASTM D - 97	- 45
Sulphated ashes (% weight)	ASTM D - 874	<0.8
TBN mg KOH/g	ASTM D - 2896	>6

The data provided are based on standard tests in laboratory conditions and serve only as a reference point. This data sheet and the information contained herein are valid on the date of issue.



Performance & Quality Oil