

Astar Sportback Eco WSS 5W20

Fully synthetic - A1 / B1 Recommended for Ford EcoBoost.

Fully synthetic engine oil specially designed for gasoline engines "Fuel Economy", which require special lubricants with low friction and low HTHS (min. 2.6).




SAFETY / HYGIENE

Safety data sheets are available on request in order to provide up-to-date information. The company can not be held liable for damage caused by misuse of the product and in case of non-observance of the specified precautions.

SPECIFICATIONS

- ACEA A1 / B1-12
- Ford WSS- M2C 948B
- API: SN

PACKAGING

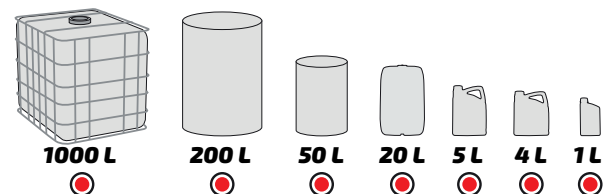

CHEMICAL PROPERTIES

Analysis type	Method	Results
Grade SAE		5W-20
Viscosity at 100° C. (cSt)	ASTM D - 445	5.6 - 9.30
Viscosity at -30°C. (cP)	ASTM D - 5293	<6600
Viscosity Index min.	ASTM D - 2270	160
Flash point (°C)	ASTM D - 92	228
Pour Point. (°C)	ASTM D - 97	-45
Sulphated ashes (% weight)	ASTM D - 874	<1.3
TBN mg KOH/g	ASTM D - 2896	>8.0

The data provided are based on standard tests in laboratory conditions and serve only as a reference point. This data sheet and the information contained herein are valid on the date of issue.



Performance & Quality Oil